

# Ideal Hot & Cold Tap Available Early 2022

IHT-D-PSS



Polished  
Stainless Steel

IHT-D-MSS



Matte  
Stainless Steel

IHT-D-GSS



PVD Gun Metal Gray™  
Stainless Steel

IHT-D-BSS



PVD Satin Black  
Stainless Steel

IHT-D-YSS



PVD Brushed Gold  
Stainless Steel  
*Limited Edition*

IHT-D-RSS




PVD Polished Rose Gold  
Stainless Steel  
*Limited Edition*

## Specifications

### Ideal Hot & Cold Tap

Solid 316L Machined Stainless Steel Construction  
Forward rotating COMFORTFEEL™ lever handles  
Hot side lever is spring loaded for automatic shutoff 1/4 turn  
Ceramic disk cartridges  
Spout rotates 360°  
Laminar Ideal Flow.  
Thermally insulated spout  
Provides filtered (not included), hot water, 208°F max temperature  
Provides filtered (not included), cold water (not chilled)  
Optional base ring included  
8 7/8" fill height from deck to spout outlet  
Total height 13 1/4"  
.50 GPM maximum flow rate for hot water  
1.30 GPM maximum flow rate for cold (not chilled) water  
Maximum counter thickness 2 1/4"  
Minimum install hole diameter 1 3/8"  
Compatible with reverse osmosis filtration systems  
Limited Lifetime Mechanical and Finish Warranty  
For use with Water Filtration System\* (not included)  
For use with Ideal Hot Water Tank™ (included)  
\*Note: May reduce water flow

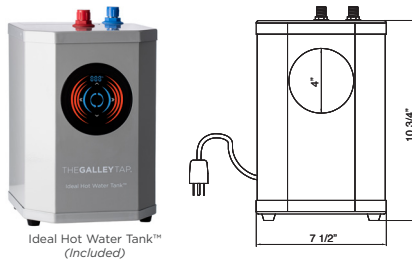

Ideal Hot Water Tank™  
(Included)

### Ideal Hot Water Tank

Digital control touch panel  
Adjustable temperature settings = 3° increments  
Seven preset temperatures = 167°-208°F  
Digital temperature control within 1-2°  
On/off button with vacation mode feature  
1500 watt/120-volt ceramic encased rapid-recovery element  
60 cups per hour capacity  
Standby reheat feature with low energy consumption 1W  
Standby reheat at 6° temperature-drop  
Built-in dry Burn and overheat sensors  
Built-in 60 psi RV with patented Baffle Fill System  
Encased element prevents limescale build-up  
Double venturi reduces faucet "dripping/spitting"  
Compatible with reverse osmosis filtration systems  
Space-saving 7 1/2" W x 7 1/2" D x 10 3/4" H  
Cabinet-side or floor-mount install options  
Parts Included: Silicone Washers, Adapters

## Construction

### Ideal Hot & Cold Tap

Solid 316L machined stainless steel construction  
Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Polished Rose Gold  
Indoor & outdoor  
Limited Lifetime Warranty  
Made in Italy

### Ideal Hot Water Tank

304 stainless steel tank 0.6 USG (2.4 litres)  
Five Year Warranty

## Codes/Standards

### Ideal Hot & Cold Tap

ASME 112.18.1  
CSA B125.1  
CALGreen  
cUPC *In Progress*  
NPC  
ADA

### Ideal Hot Water Tank

UL Certified

