

# DryDock® 12

Add to any Workstation. Over 138 possibilities.

## DD-12-S



## Specifications

DryDock Tool included: One  
 Outside dimensions: 12" x 19 1/2" x 2 1/16"  
 Countertop cutout: Add 12" to IWS width  
 Minimum cabinet size: Add 12" to IWS width  
 Minimum clearance required below countertop: 2"  
 Location: Drain side (S) and/or non-drain side (N)  
 and/or center drain (C)

## Basin (DS-12)

16GA 316L stainless steel indoor/outdoor  
 SilentArmor™ sound reduction technology  
 Angel finish  
 Three tier design  
 Star™ groove pattern  
 Limited Lifetime Warranty  
 Made in the USA  
 ASME A112.19.3/CSA B45.4 certified

## DryDock Tool included (DR-12)



(1) Lower Tier  
 Drying Rack  
 12 1/4" x 17"  
 DR-12-L-WA



(1) Lower Tier  
 Drying Rack  
 12 1/4" x 17"  
 DR-12-L-GT



(1) Lower Tier  
 Drying Rack  
 12 1/4" x 17"  
 DR-12-L-BA




(1) Lower Tier  
 Drying Rack  
 12 1/4" x 17"  
 DR-12-L-GR




(1) Lower Tier  
 Drying Rack  
 12 1/4" x 17"  
 DR-12-L-WH


## EXAMPLE 3



Suggested maximum inside corner radius of countertop cutout 3/8"

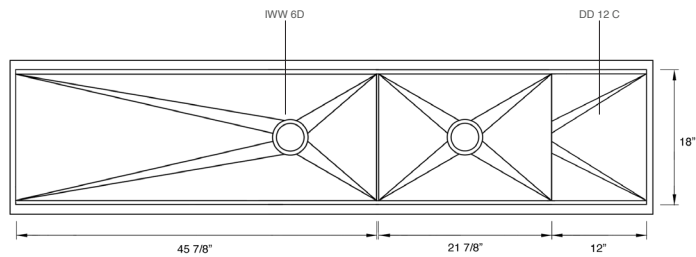


**Important Installation Note:** DryDock requires 2" minimum clearance below countertop

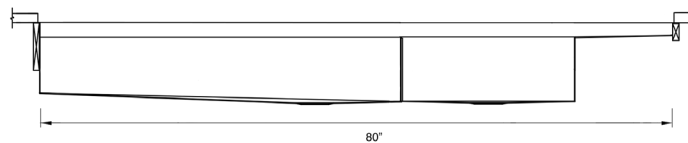


IWW-6-D-DD-12-C-xx


## EXAMPLE 4



Suggested maximum inside corner radius of countertop cutout 3/8"

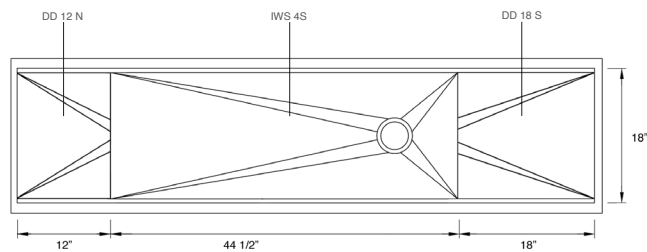

**Important Installation Note:** DryDock requires 2" minimum clearance below countertop

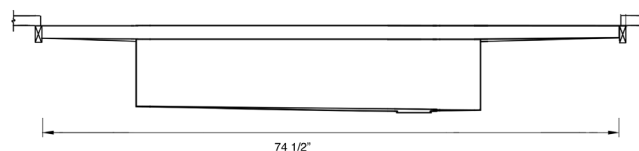

IWS-4-S-DD-12-N-DD-18-S-xx