

DryDock® 18

Add to any Workstation. Over 138 possibilities.

DD-18-S



Specifications

DryDock Tool included: One
 Outside dimensions: 18" x 19 1/2" x 2 1/16"
 Countertop cutout: Add 18" to IWS width
 Minimum cabinet size: Add 18" to IWS width
 Minimum clearance required below countertop: 2"
 Location: Drain side (S) and/or non-drain side (N)
 and/or center drain (C)

Basin (DS-18)

16GA 316L stainless steel indoor/outdoor
 SilentArmor™ sound reduction technology
 Angel finish
 Three tier design
 Star™ groove pattern
 Limited Lifetime Warranty
 Made in the USA
 ASME A112.19.3/CSA B45.4 certified

DryDock Tool included (DR-18)



(1) Dual Tier
 Drying Rack
 18" x 17"
 DR-18-D-WA



(1) Dual Tier
 Drying Rack
 18" x 17"
 DR-18-D-GT



(1) Dual Tier
 Drying Rack
 18" x 17"
 DR-18-D-BA




(1) Dual Tier
 Drying Rack
 18" x 17"
 DR-18-D-GR




(1) Dual Tier
 Drying Rack
 18" x 17"
 DR-18-D-WH


EXAMPLE 1



Suggested maximum inside corner radius of countertop cutout 3/8"

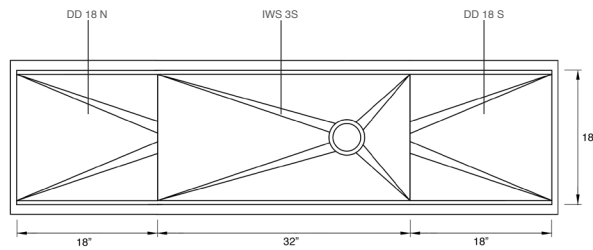


Important Installation Note: DryDock requires 2" minimum clearance below countertop

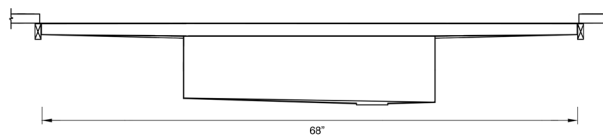


IWS-3-S-DD-18-N-DD-18-S-xx


EXAMPLE 2



Suggested maximum inside corner radius of countertop cutout 3/8"

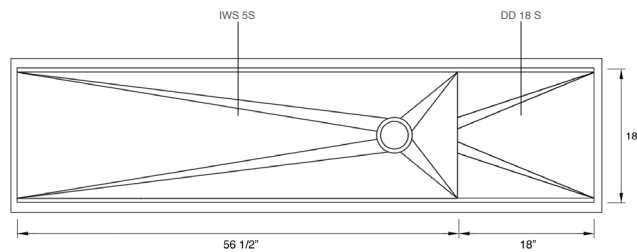

Important Installation Note: DryDock requires 2" minimum clearance below countertop

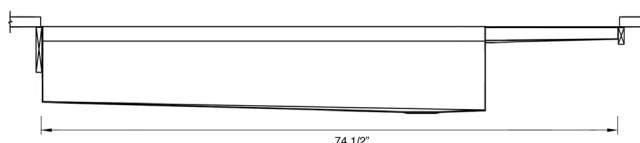

IWS-5-S-DD-18-S-xx