



Ideal Pot Filler Tap with Filtration

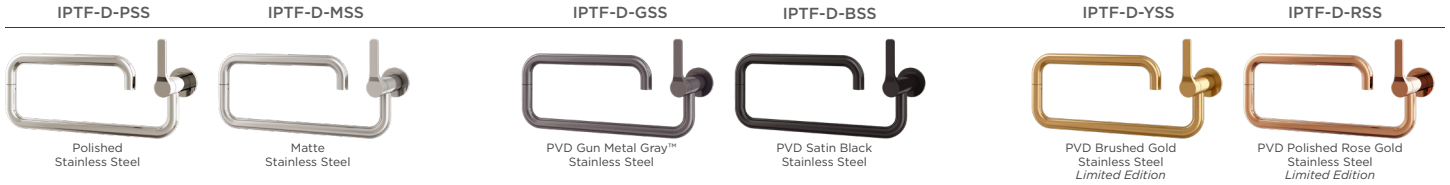

Specifications

Ideal Pot Filler Tap

- Single-lever control
- 1/4 turn ceramic disc valve cartridge
- COMFORTFEEL™ lever handle
- Cold water valve, one inlet
- Rough-in part required (sold separately)
- Laminar Ideal Flow®
- Dual swivel spout
- 24" projection
- 4.2 GPM
- For use with Water Filtration System* (included)
- *Note: May reduce water flow

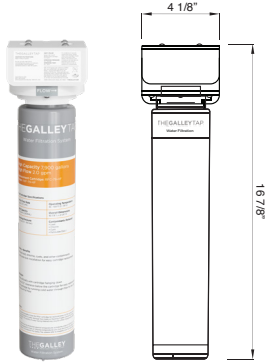

Water Filtration System
(Included)

Water Filtration System

- Service flow rate 2.0 gpm
- Rated capacity 7,900 gallons
- Operating pressure 10 - 125 psi
- Operating temperature 35 - 100°F
- Overall dimensions 16 7/8" x 4 1/8"
- Reduces lead, chlorine, cysts and other contaminants
- Quick twist-lock cartridge replacement
- Replacement filter cartridge dimensions 14 1/2" x 3"
- Internal parts never exposed to human handling
- Filtration protects capital equipment from early breakdown
- Installs vertically (allow 2 1/2" clearance)
- Parts Included: Mounting bracket and screws, plastic tubing, push-fit Tee

Construction

Ideal Pot Filler Tap

- Solid 316L machined stainless steel construction
- Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Polished Rose Gold
- Indoor & outdoor
- Limited Lifetime Warranty
- Made in Italy

Water Filtration System

- Five Year Warranty
- Made in the USA

Codes/Standards

Ideal Pot Filler Tap

- NSF
- cUPC

Water Filtration System

- IAPMO Certified
- NSF/ANSI 42, 53, 372

