IWS 3S ThinTop[™] + DryDock. 12 THE SPECIFICATIONS





IWS-3-S-DD-12-S-TT-GT



Graphite Wood Composite

IWS-3-S-DD-12-S-TT-BA




IWS-3-S-DD-12-S-TT-GR





Designer White Resin*

Culinary Tools included (CKT-12)









Specifications

Single bowl Users: 1 Culinary Tools included: Five DryDock Tool included: One Galley Tap recommended: One Outside dimensions: 45 1/2" x 19 1/2" x 2 7/8" Interior dimensions: 44" x 18" x 2 3/4" Countertop cutout: 44" x 18" Minimum cabinet size: 48" or 120cm Minimum clearance required for DryDock below countertop: 3" DryDock location: Drain side (S)

Basin (KSO-3-S-DS-12-S-TT-SS)


16GA 316L stainless steel indoor/outdoor SilentArmor[™] sound reduction technology Angel finish Three tier design Star™ groove pattern Reversible side drain Drain cover included Limited Lifetime Warranty Made in the USA ASME A112.19.3/CSA B45.4 certified cUPC™ certified








DB-12-L-xx

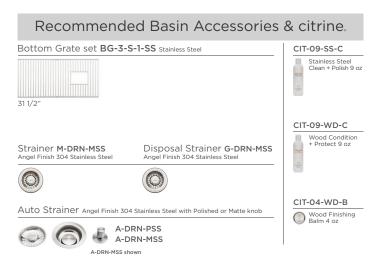

IWS 3S ThinTop[™] + DryDock. 12 THE SPECIFICATIONS | Right Hand Drain Orientation

Tap Hole Specifications



SUGGESTED GALLEY TAP PLACEMENT GUIDE


Suggested maximum inside corner radius of counterlop cutout 3/8" (1) Galley Tap 1 3/8" min to 1 1/2" max hole diameter Center Tap hole diameters 2" behind cutout Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap


Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 3" minimum clearance below countertop

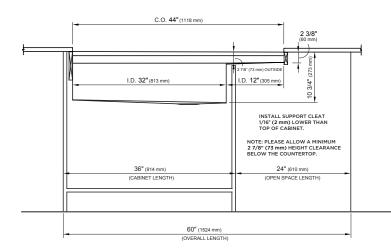



1/2"(8

24" (610 mm)


(CABINET DEPTH)

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website: TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255




ALL

.Е

SPECIFICATIONS | Left Hand Drain Orientation

Tap Hole Specifications



SUGGESTED GALLEY TAP PLACEMENT GUIDE


Suggested maximum inside corner radius of counterlop cutout 3/8" (1) Galley Tap 1 3/8" min to 1 1/2" max hole diameter Center Tap hole diameters 2" behind cutout Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap


Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 3" minimum clearance below countertop

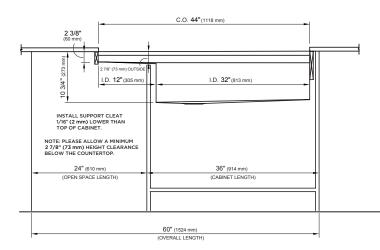





STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website: TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

