IWA 30S + DryDock, 18

THE GALLEY.

IWA-30-S-DD-18-S-WA



American Black Walnut / Graphite Resin+

IWA-30-S-DD-18-S-GT



Graphite Wood Composite / Graphite Resin+

IWA-30-S-DD-18-S-BA



Natural Golden Bamboo / Exclusive Gray Resin+

IWA-30-S-DD-18-S-GR



Exclusive Gray Resin* / Resin+

IWA-30-S-DD-18-S-WH



Designer White Resin* / Resin+

Wash Tools included (WKT-4T)







WC-06-L-xx



Wash Bowl 12" x 17"


WB-12-L-xx



(1) Upper Tier Utensil Caddy 6" x 18" UC-06-U-xx

Upper Deck.

Cover set UD-30-18-3P-WA/GT/BA/GR/WH Walnut, Graphite, Bamboo, Gray or White Resin





Sections Walnut, Graphite, Bamboo, Gray or White Resin



Specifications

Single bowl
Users: 1
Wash Tools included: Four
DryDock Tool included: One
Galley BarTap₀ recommended: One
Outside dimensions: 45 1/2" x 19 1/2" x 2 1/16"
Interior dimensions: 44" x 17" x 2"
Countertop cutout: 44 1/2" x 18"
Minimum cabinet size: 48" or 120cm
Minimum clearance required for DryDock
below countertop: 2 1/4"
DryDock location: Drain side (S)

Basin (KSO-30-S-DS-18-S-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish Three tier design Star™ groove pattern Reversible side drain Drain cover included Limited Lifetime Warranty Made in the USA ASME A112.19.3/CSA B45.4 certified cUPC™ certified

Customize Your Galley

Add 7-12" length Add 1-6" length Add 18" DryDoo Add 12" DryDoo or depth
Center drain
ThinTop™
VorkTop™
Color coded labels

DryDock Tool included (DR-18)



(1) Dual Tier Drying Rack 18" x 17" DR-18-D-xx

Recommended Basin Accessories & citrine

Bottom Grate set BG-30-S-1-SS stainless Steel



Strainer M-DRN-MSS Angel Finish 304 Stainless Stee Disposal Strainer G-DRN-MSS Angel Finish 304 Stainless Steel





Auto Strainer Angel Finish 304 Stainless Steel with Polished or Matte knob









CIT-09-WD-C


Wood Condition
+ Protect 9 oz

Stainless Steel Clean + Polish 9 oz

IWA 30S + DryDock, 18 SPECIFICATIONS | Right Hand Drain Orientation



Tap Hole Specifications




C.O. 18" (457 mm) 1/2" (13 mm) REVEAL FRONT AND BACK (254 r 10 I.D. 16" (406 mm)

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley BarTap- 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email **customercare@thegalley.com** for additional guidance on Tap and Tap Accessory placements

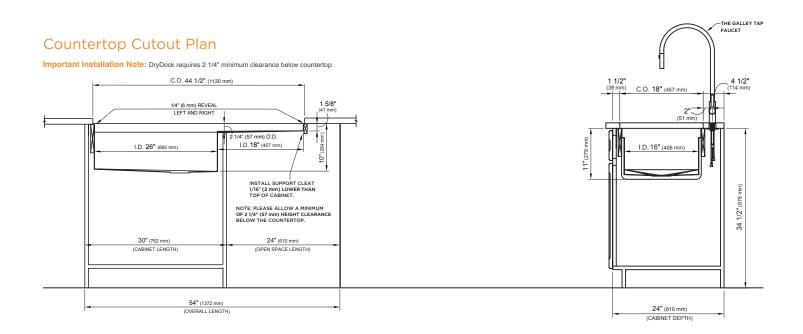

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

IWA 30S + DryDock, 18



Tap Hole Specifications




SUGGESTED GALLEY TAP PLACEMENT GUIDE


Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley BarTap- 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements



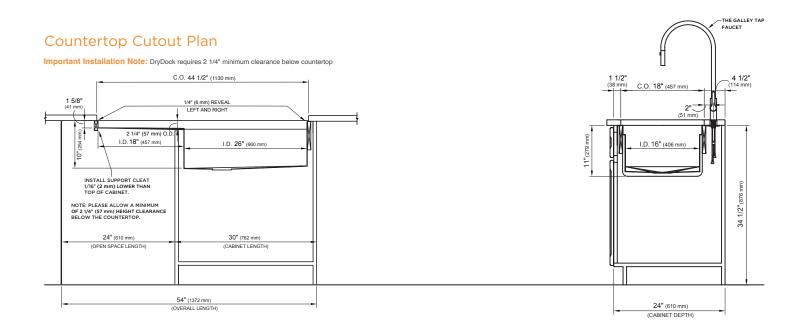

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255