

IWA 3S + DryDock. 12

SPECIFICATIONS

THE GALLEY®

IWA-3-S-DD-12-S-WA



American Black Walnut / Graphite Resin+

IWA-3-S-DD-12-S-GT



Graphite Wood Composite / Graphite Resin+

IWA-3-S-DD-12-S-BA



Natural Golden Bamboo / Exclusive Gray Resin+

IWA-3-S-DD-12-S-GR



Exclusive Gray Resin* / Resin+

IWA-3-S-DD-12-S-WH



Designer White Resin* / Resin+

Wash Tools included (WKT-4T)



- (1) Upper Tier Drying Rack
9 1/4" x 18"
DR-09-U-xx
- (1) Lower Tier Wash Caddy
6" x 17"
WC-06-L-xx
- (1) Lower Tier Wash Bowl
12" x 17"
WB-12-L-xx
- (1) Upper Tier Utensil Caddy
6" x 18"
UC-06-U-xx

Specifications

Single bowl
Users: 1
Wash Tools included: Four
DryDock Tool included: One
Galley Tap recommended: One
Outside dimensions: 45 1/2" x 19 1/2" x 2 1/16"
Interior dimensions: 44" x 17" x 2"
Countertop cutout: 44 1/2" x 18"
Minimum cabinet size: 48" or 120cm
Minimum clearance required for DryDock below countertop: 2 1/4"
DryDock location: Drain side (S)

Basin (KSO-3-S-DS-12-S-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front

9" depth
Center drain
ThinTop™
WorkTop™
*Color coded labels available

DryDock Tool included (DR-12)



- (1) Lower Tier Drying Rack
12 1/4" x 17"
DR-12-L-xx

Upper Deck.

Cover set UD-3-12-3P-WA/GT/BA/GR/WH Walnut, Graphite, Bamboo, Gray or White Resin




Sections Walnut, Graphite, Bamboo, Gray or White Resin



Recommended Basin Accessories & citrine.

Bottom Grate set BG-3-S-1-SS Stainless Steel



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel




Disposal Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel




Auto Strainer Angel Finish 304 Stainless Steel with Polished or Matte knob




CIT-09-SS-C



CIT-09-WD-C



CIT-04-WD-B




IWA 3S + DryDock[®] 12

SPECIFICATIONS | Right Hand Drain Orientation



Tap Hole Specifications

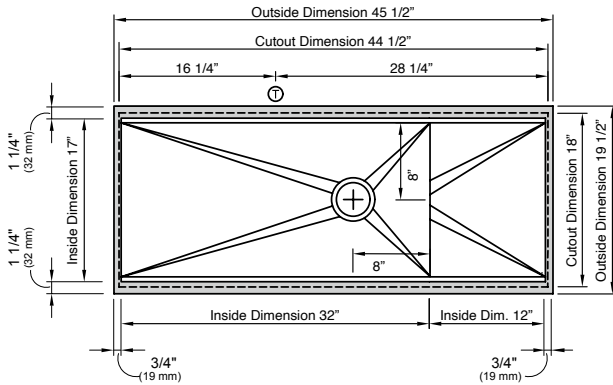

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"


① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap



Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer@thegalley.com
for additional guidance on Tap and Tap Accessory placements

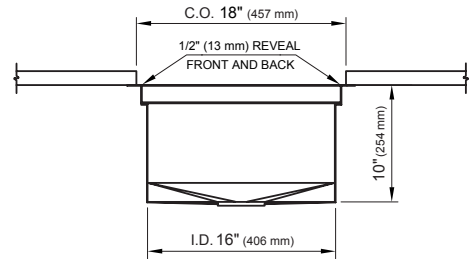

Countertop Cutout Plan

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

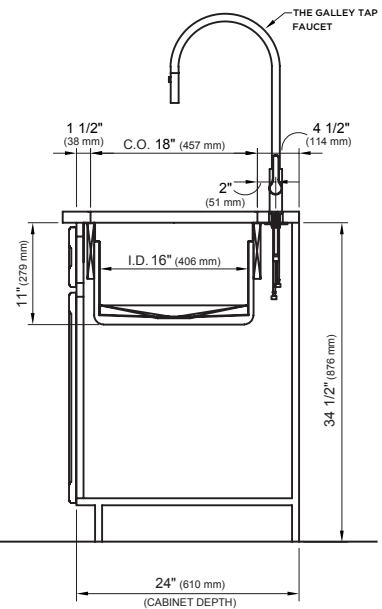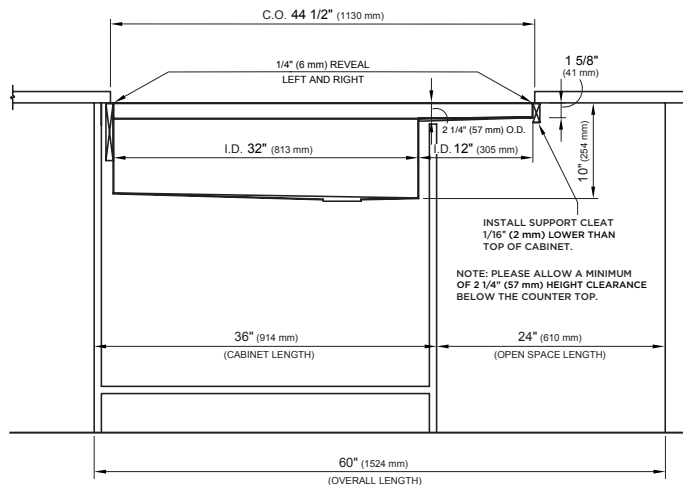

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08


WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255

THE GALLEY®

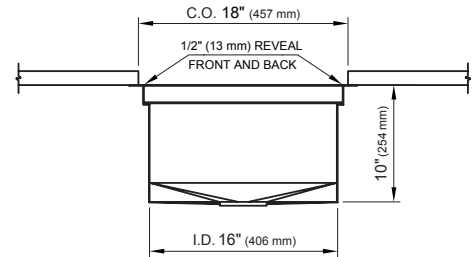[illegible]

Note: Tap 1 placements are for right hand or left hand drain orientation

C.O. 44 1/2" (1130 mm)

1 5/8" (41 mm)

1/4" (6 mm) REVEAL
LEFT AND RIGHT

2 1/4" (57 mm) O.D.

I.D. 12" (305 mm)

I.D. 32" (813 mm)

10" (254 mm)


INSTALL SUPPORT CLEAT
1/16" (2 mm) LOWER THAN
TOP OF CABINET.

NOTE: PLEASE ALLOW A MINIMUM
OF 2 1/4" (57 mm) HEIGHT CLEARANCE
BELOW THE COUNTER TOP.

24" (610 mm)
(OPEN SPACE LENGTH)

36" (914 mm)
(CABINET LENGTH)

60" (1524 mm)
(OVERALL LENGTH)

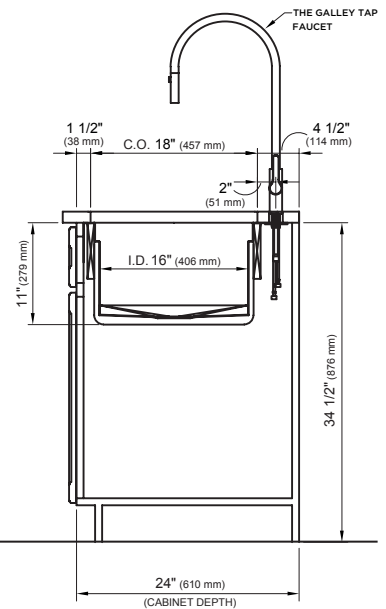

*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*