Ideal WashStation™ 4S

THEGALLEY REINVENT YOUR KITCHEN

IWA-4-S-WA



American Black Walnut / Graphite Resin-

IWA-4-S-GT



Graphite Wood Composite / Graphite Resin+

IWA-4-S-BA



Natural Golden Bamboo / Exclusive Gray Resin+

IWA-4-S-GR



Exclusive Gray Resin* / Resin+

IWA-4-S-WH



Designer White Resin* / Resin+

Wash Tools included (WKT-4T)



Drying Rack 9 1/4" x 18"

DR-09-U-xx









(1) Upper Tier Utensil Caddy 6" x 18" UC-06-U-xx

Upper Deck

Cover set UD-4-2P-WA/GT/BA/GR/WH Walnut, Graphite, Bamboo, Gray or White Resin





Sections Walnut, Graphite, Bamboo, Gray or White Resin



Specifications

Single bowl Users: 1

Wash Tools included: Four

Galley Tap recommended: One Outside dimensions: 45 1/2" x 19 1/2" x 10 5/16"

Interior dimensions: 44" x 17" x 10" Countertop cutout: 44 1/2" x 18"

Basin area: 44" x 16"

Minimum cabinet size: 48" or 120cm

Basin (KSO-4-S-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish

Three tier design

Star™ groove pattern Reversible side drain

Drain cover included

Limited Lifetime Warranty

Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified

Customize Your Galley

Add 7-12" length Add 1-6" length Add 18" DryDock Add 12" DryDock 9" depth Center drain ΓhinTop™ WorkTop™

Recommended Basin Accessories & citrine.

Bottom Grate set BG-4-S-2-SS Stainless Steel



11 1/2" 31 1/2"

Strainer M-DRN-MSS

Disposal Strainer G-DRN-MSS





Auto Strainer Angel Finish 304 Stainless Steel with Polished or Matte knob







Wood Condition + Protect 9 oz

CIT-09-WD-C

CIT-09-SS-C

Stainless Steel
Clean + Polish 9 oz


CIT-04-WD-B




Ideal WashStation™ 4S



Tap Hole Specifications






SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

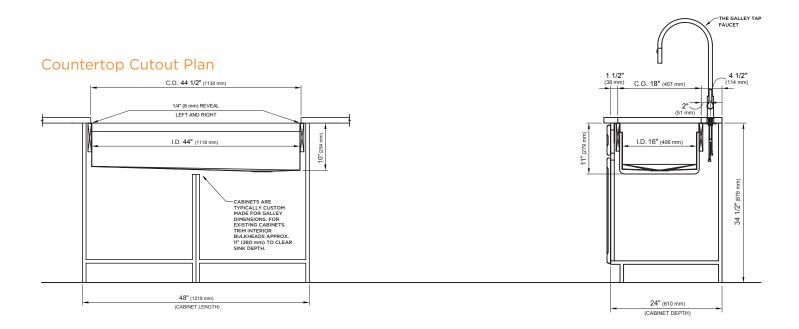

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.


DWG and DXF templates available on our website:

The Galley.com/specification-library

Ideal WashStation™ 4S



Tap Hole Specifications




C.O. 18" (457 mm) 1/2" (13 mm) REVEAL FRONT AND BACK 10"(254 I.D. 16" (406 mm)

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

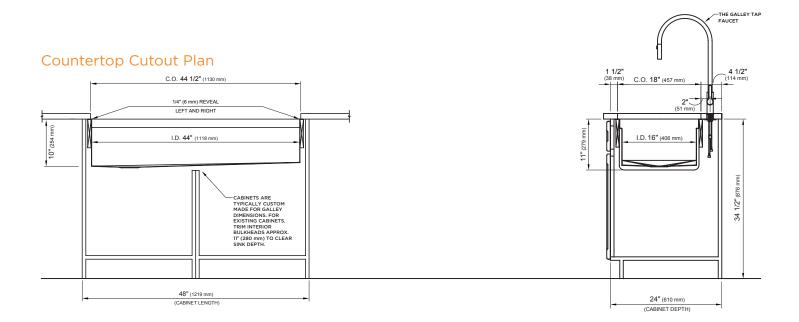

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255