## IWS 4S + DryDock, 12

#### SPECIFICATIONS

#### IWS-4-S-DD-12-S-WA



American Black Walnut

#### IWS-4-S-DD-12-S-GT



Graphite Wood Composite

#### IWS-4-S-DD-12-S-BA



Natural Golden Bamboo

#### IWS-4-S-DD-12-S-GR



Exclusive Gray Resin\*

#### IWS-4-S-DD-12-S-WH



Designer White Resin\*

#### Culinary Tools included (CKT-12)



Section<sup>†</sup> 12" x 19"

UD-12-I-xx





DR-12-U-xx



CB-12-U-xx



Platforms

P1-12-L-xx



C1-11-0-ST



(1) SS Mixing Bowl 11" 7.2-qt B1-11-0-ST

†The Upper Deck requires a 1/4" clearance below the surface of the countertop. If the countertop thickness is 3/4" or less, Walnut or Bamboo Upper Deck sections will not have the clearance to function above the Upper Tier Culinary Tools

#### Upper Deck.



Sections Walnut, Graphite, Bamboo, Gray or White Resin



### THE GALLEY.

#### **Specifications**

Single bowl
Users: 1
Culinary Tools included: Five
DryDock Tool included: One
Galley Tap recommended: One
Outside dimensions: 57 1/2" x 19 1/2" x 2 1/16"
Interior dimensions: 56" x 17" x 2"
Countertop cutout: 56 1/2" x 18"
Minimum cabinet size: 60" or 150cm
Minimum clearance required for DryDock
below countertop: 2 1/4"
DryDock location: Drain side (S)

#### Basin (KSO-4-S-DS-12-S-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish Three tier design Star™ groove pattern Reversible side drain Drain cover included Limited Lifetime Warranty Made in the USA ASME A112.19.3/CSA B45.4 certified cUPC™ certified

#### Customize Your Galley

Add 7-12" length Add 1-6" length Add 18" DryDock Add 12" DryDock " depth Center drain hinTop™ VorkTop™ Color coded labels a

#### DryDock Tool included (DR-12)



(1) Lower Tier Drying Rack 12 1/4" x 17" DR-12-L-xx

#### Recommended Basin Accessories & citrine.



Strainer M-DRN-MSS
Angel Finish 304 Stainless Stee

Disposal Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel





Auto Strainer Angel Finish 304 Stainless Steel with Polished or Matte knob









CIT-09-WD-C


Wood Condition
+ Protect 9 oz


Stainless Steel Clean + Polish 9 oz

### IWS 4S + DryDock, 12 SPECIFICATIONS | Right Hand Drain Orientation



#### Tap Hole Specifications

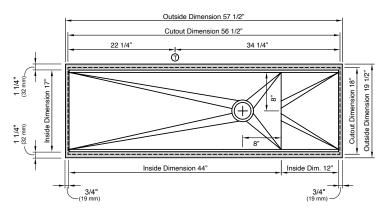

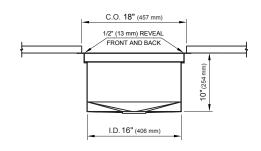


#### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email **customercare@thegalley.com** for additional guidance on Tap and Tap Accessory placements

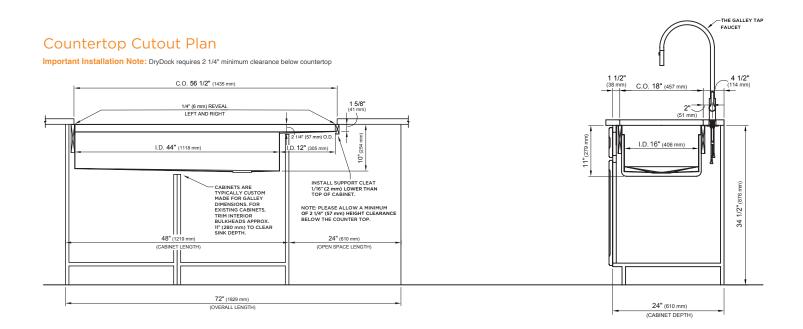

#### STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


TheGalley.com/specification-library


Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

# IWS 4S + DryDock, 12



#### Tap Hole Specifications

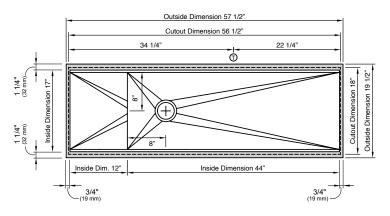

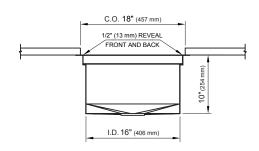

#### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

THE GALLEY TAP Countertop Cutout Plan Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop 4 1/2" (114 mm) C.O. 56 1/2" (1435 mm) C.O. 18" (457 mm) 1/4" (6 mm) REVEAL LEFT AND RIGHT I.D. 16" (406 mm) I.D. 12" (305 m I.D. 44" (1118 mm INSTALL SUPPORT CLEAT 1/16" (2 mm) LOWER THAN TOP OF CABINET. CABINETS ARE
TYPICALLY CUSTOM
MADE FOR GALLEY
DIMENSIONS. FOR
EXISTING CABINETS,
TRIM INTERIOR
BULKHEADS APPROX.
I" (280 mm) TO CLEAR
SINK DEPTH. NOTE: PLEASE ALLOW A MINIMUM OF 2 1/4" (57 mm) HEIGHT CLEARANCE BELOW THE COUNTER TOP. 1/2" 34 24" (610 mm) (OPEN SPACE LENGTH) 72" (1829 mm) 24" (610 mm)

#### STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255