

Ideal Hot & Cold Tap

Certification Pending

IHT D PSS



Polished
Stainless Steel

IHT D MSS



Matte
Stainless Steel

IHT D GSS



PVD Gun Metal Gray™
Stainless Steel

IHT D BSS



PVD Satin Black
Stainless Steel

IHT D YSS



PVD Brushed Gold
Stainless Steel
Limited Edition

IHT D RSS




PVD Rose Gold
Stainless Steel
Limited Edition

Specifications

Ideal Hot & Cold Tap

Solid 316L Machined Stainless Steel Construction
Forward rotating COMFORTFEEL™ lever handles
Hot side lever is spring loaded for automatic shutoff 1/4 turn
Ceramic disk cartridges
Spout rotates 360°
Laminar Ideal Flow®
Thermally insulated spout
Provides filtered (not included), hot water, 208°F max temperature
Provides filtered (not included), cold water (not chilled)
Optional base ring included
8 7/8" fill height from deck to spout outlet
Total height 13 1/4"
.50 GPM maximum flow rate for hot water
1.30 GPM maximum flow rate for cold (not chilled) water
Maximum counter thickness 2 1/4"
Minimum install hole diameter 1 3/8"
Compatible with reverse osmosis filtration systems
Limited Lifetime Mechanical and Finish Warranty
For use with full flow filtration unit (not included)
For use with Ideal Hot Water Tank™ (included)

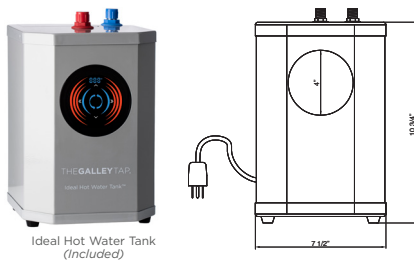

Ideal Hot Water Tank
(included)

Ideal Hot Water Tank

Digital control touch panel
Adjustable temperature settings = 3° increments
Seven preset temperatures = 167°-208°F
Digital temperature control within 1-2°
On/off button with vacation mode feature
1500 watt/120-volt ceramic encased rapid-recovery element
60 cups per hour capacity
Standby reheat feature with low energy consumption 1W
Standby reheat at 6° temperature-drop
Built-in dry Burn and overheat sensors
Built-in 60 psi RV with patented Baffle Fill System
Encased element prevents limescale build-up
Double venturi reduces faucet "dripping/spitting"
Compatible with reverse osmosis filtration systems
Space-saving 7 1/2" W x 7 1/2" D x 10 3/4" H
Cabinet-side or floor-mount install options
Parts Included: Silicone Washers, Adapters

Construction

Ideal Hot & Cold Tap

Solid 316L machined stainless steel construction
Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Polished Rose Gold
Indoor & outdoor
Limited Lifetime Warranty
Made in Italy

Ideal Hot Water Tank™

304 stainless steel tank 0.6 USG (2.4 litres)
Five Year Warranty

Codes/Standards

Ideal Hot & Cold Tap

ASME 112.18.1
CSA B125.1
CALGreen
cUPC *In Progress*
NPC
ADA

Ideal Hot Water Tank

UL Certified

