

# Ideal Hot & Cold Tap

IHT-D-PSS



Polished  
Stainless Steel

IHT-D-MSS



Matte  
Stainless Steel

IHT-D-GSS



PVD Gun Metal Gray™  
Stainless Steel

IHT-D-BSS



PVD Satin Black  
Stainless Steel

IHT-D-YSS



PVD Brushed Gold  
Stainless Steel  
*Limited Edition*

IHT-D-RSS




PVD Polished Rose Gold  
Stainless Steel  
*Limited Edition*

## Specifications

### Ideal Hot & Cold Tap

Solid 316L Machined Stainless Steel Construction  
 Forward rotating COMFORTFEEL™ lever handles  
 Hot side lever is spring loaded for automatic shutoff 1/4 turn  
 Ceramic disk cartridges  
 Spout rotates 360°  
 Laminar Ideal Flow®  
 Thermally insulated spout  
 Provides filtered (not included), hot water, 208°F max temperature  
 Provides filtered (not included), cold water (not chilled)  
 Optional base ring included  
 8 7/8" fill height from deck to spout outlet  
 Total height 13 1/4"  
 .50 GPM maximum flow rate for hot water  
 1.30 GPM maximum flow rate for cold (not chilled) water  
 Maximum counter thickness 2 1/4"  
 Minimum install hole diameter 1 3/8"  
 Compatible with reverse osmosis filtration systems  
 Limited Lifetime Mechanical and Finish Warranty  
 For use with Water Filtration System\* (not included)  
 For use with Ideal Hot Water Tank™ (included)  
 \*Note: May reduce water flow

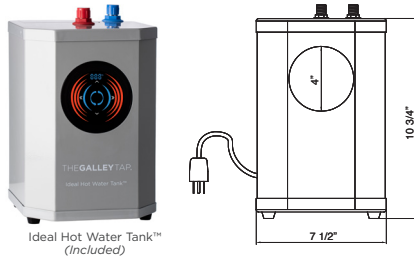

Ideal Hot Water Tank™  
(Included)

### Ideal Hot Water Tank

Digital control touch panel  
 Adjustable temperature settings = 3° increments  
 Seven preset temperatures = 167°-208°F  
 Digital temperature control within 1-2°  
 On/off button with vacation mode feature  
 1500 watt/120-volt ceramic encased rapid-recovery element  
 60 cups per hour capacity  
 Standby reheat feature with low energy consumption 1W  
 Standby reheat at 6° temperature-drop  
 Built-in dry Burn and overheat sensors  
 Built-in 60 psi RV with patented Baffle Fill System  
 Encased element prevents limescale build-up  
 Double venturi reduces faucet "dripping/spitting"  
 Compatible with reverse osmosis filtration systems  
 Space-saving 7 1/2" W x 7 1/2" D x 10 3/4" H  
 Cabinet-side or floor-mount install options  
 Parts Included: Silicone Washers, Adapters

## Construction

### Ideal Hot & Cold Tap

Solid 316L machined stainless steel construction  
 Available in Polished, Matte, PVD Gun Metal Gray™, PVD  
 Satin Black, PVD Brushed Gold, PVD Polished Rose Gold  
 Indoor & outdoor  
 Limited Lifetime Warranty  
 Made in Italy

### Ideal Hot Water Tank

304 stainless steel tank 0.6 USG (2.4 litres)  
 Five Year Warranty

## Codes/Standards

### Ideal Hot & Cold Tap

ASME 112.18.1  
 NSF/ANSI/CAN 61  
 CSA B125.1  
 cUPC  
 ADA

### Ideal Hot Water Tank

UL Certified

