# Ideal WashStation™ 4X4C **SPECIFICATIONS**











IWA-4X4-C-GR



IWA-4X4-C-WH



# **Specifications**

Single bowl Users: 2 (Outside Corner), 1 (Inside Corner)

Wash Tools included: Four Galley Tap(s) recommended:

Two (Outside Corner), One (Inside Corner) Outside dimensions: 44" x 44" x 19 1/2" x 10 5/16" Countertop cutout: 42 3/4" x 42 3/4" x 18" Basin area: 42" x 42" x 16" Min. cabinet size: 48" x 48" or 120cm x 120cm

#### Basin (KSO-4X4-C-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish Two tier design Star™ groove pattern Side drain Drain cover included Limited Lifetime Warranty Made in the USA ASME A112.19.3/CSA B45.4 certified

#### Wash Tools included (WKT-4T)



(1) Upper Tier

Drying Rack

9 1/4" x 18"

DR-09-U-xx



6" x 17'

Wash Caddy

WC-06-L-xx





(1) Lower Tier Wash Bowl 12" x 17"

(1) Upper Tier Utensil Caddy 6" x 18" UC-06-U-xx

Personalize Your IWA-4X4-C

Add 7-12" length Add 1-6" length Add 18" DryDock

Add 12" DryDock 9" height

Galley Tap collection Optional Culinary Tools \*Color coded labels available

# Upper Deck™

Upper Deck cover set UD-4X4-3P-GT/BA/GR/WH Graphite, Bamboo, Gray or White Resin




Upper Deck sections Graphite, Bamboo, Gray or White Resin












# Recommended Basin Accessories

Bottom Grate set BG-4X4-C-3-SS Stainless Steel



Manual Strainer Basket M-DRN-MSS Angel Finish 304 Stainless Steel Disposal Flange Strainer Basket G-DRN-MSS Angel Finish 304 Stainless Steel





Auto Strainer Basket Angel Finish 304 Stainless Steel with Polished or Matte knob








A-DRN-PSS A-DRN-MSS

# Ideal WashStation™ 4X4C SPECIFICATIONS



#### Tap Hole Specifications



OUTSIDE CORNER INSTALLATION SUGGESTED GALLEY TAP AND TAP ACCESSORIES PLACEMENT GUIDE


(Recommendations are based on installing 3 or more Tap accessories)
Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min hole diameter (1 1/2" min hole diameter for fast water jet cut)

① (3) Galley Soap Dispenser 1" min to 1 3/8" max hole diameter, or Galley Deck Switch 1 3/8" min hole diameter or Galley Automatic Strainer Basket knob 1" min

and 1 3/8" max hole diameter, or
Galley Hot & Cold Tap 1 3/8" min hole diameter (1 1/2" min hole diameter for fast water jet cut)
Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: For inner corner dimensions (O.D., C.O., I.D.) on Outside Corners, look to Inside Corner drawings



INSIDE CORNER INSTALLATION SUGGESTED GALLEY TAP AND TAP ACCESSORIES PLACEMENT GUIDE

- (Recommendations are based on installing 3 or more Tap accessories)


  Suggested maximum inside corner radius of countertop cutout 3/8\*

  ⊕ Galley Tap 1 3/8\* min hole diameter (1 1/2\* min hole diameter for fast water jet cut)

  ⊕ Galley Deck Switch 1 3/8\* min hole diameter or Galley Automatic Strainer Basket knob 1" min and 1 3/8" max hole diameter
- (2) Galley Soap Dispenser 1" min to 1 3/8" max hole diameter
  (3) Galley Hot & Cold Tap 1 3/8" min hole diameter (1 1/2" min hole diameter for fast water jet cut)
  Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

# Countertop Cutout Plan

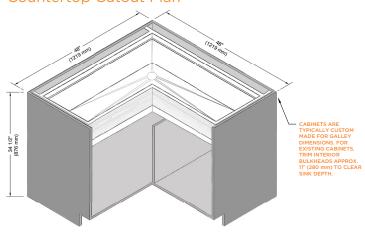

#### STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specifications

Questions? For additional assistance, please contact The Galley's Customer Service Department at 800.375.4255

